


Blanke•Floor Accent Profile

(Brass • Aluminum • Stainless steel)

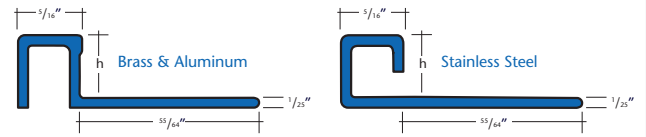

These profiles provide decorative accents between floor tiles and on coves. The Blanke•Floor Accent Profiles are available in solid brass, stainless steel and in a variety of aluminum finishes (only the solid brass and natural aluminum should be used in floor applications). The Blanke•Floor Accent Profiles can also be used to form an attractive cove corner.

Brass

Length 8.0 feet

Pack: 5 pieces

h/in.	h/mm	Part No.
1/4	6.0	304-300-06025
5/16	8.0	304-300-08025
3/8	10.0	304-300-10025
1/2	12.5	304-300-12525
19/32	15.0	304-300-15025

Brass; shiny chrome plated

Length 8.0 feet

Pack: 1 piece

h/in.	h/mm	Part No.
5/16	8.0	304-340-08025
3/8	10.0	304-340-10025
1/2	12.5	304-340-12525

Aluminum; natural

Length 8.0 feet

Pack: 5 pieces

h/in.	h/mm	Part No.
1/4	6.0	304-400-06025
5/16	8.0	304-400-08025
3/8	10.0	304-400-10025
1/2	12.5	304-400-12525
19/32	15.0	304-400-15025

Aluminum; silver anodized

Length 8.0 feet

Pack: 5 pieces

h/in.	h/mm	Part No.
1/4	6.0	304-410-06025
5/16	8.0	304-410-08025
3/8	10.0	304-410-10025
1/2	12.5	304-410-12525
19/32	15.0	304-410-15025

Aluminum; gold anodized

Length 8.0 feet

Pack: 5 pieces

h/in.	h/mm	Part No.
1/4	6.0	304-420-06025
5/16	8.0	304-420-08025
3/8	10.0	304-420-10025
1/2	12.5	304-420-12525
19/32	15.0	304-420-15025

Stainless Steel; rust-resistant; 1.4301

Length 8.0 feet

Pack: 2 pieces

h/in.	h/mm	Part No.
11/32	9.0	304-280-09025
7/16	11.0	304-280-11025
1/2	12.5	304-280-12525

Stainless Steel; rust-resistant; 1.4301 brushed

Length 8.0 feet

Pack: 2 pieces

h/in.	h/mm	Part No.
11/32	9.0	304-280B-09025
7/16	11.0	304-280B-11025
1/2	12.5	304-280B-12525

Blanke•Floor Accent Profile (inner and outer corner)

(Stainless steel)

Stainless Steel; rust-resistant; 1.4301

Pack: 2 pieces per blister

h/in.	Part No.
11/32	652-280-090
7/16	652-280-110
1/2	652-280-125

Stainless Steel; rust-resistant; 1.4301 brushed

Pack: 2 pieces per blister

h/in.	Part No.
11/32	652-280B-090
7/16	652-280B-110
1/2	652-280B-125